

# Super-ted

## Swath Conditioner

**Teagle**



[www.teagle.co.uk](http://www.teagle.co.uk)



# Super-ted

## Swath Conditioner



Get the most from your crop with a Teagle Super-ted and reap the rewards of faster drying times or crop recovery following wet weather.







Since Teagle Machinery was established over 75 years ago we have designed, built and backed innovative agricultural machinery for livestock farmers.

We remain a family business focused on meeting the needs of our customers whether just around the corner, or in one of the 35 countries worldwide to which we regularly ship our products.

From the outset, our machinery has been designed to be simple, robust and easy to use. We still stand by these values, with all our products being tested extensively on farms throughout the world to ensure that they perform reliably day-in day-out, even under the toughest conditions.

The Super-ted Swath Conditioner is no exception, quickly and effectively enabling farmers to preserve the quality of their crops in the field.

The reasons that customers return time after time to buy Teagle are twofold:

**Product Focus** – We actively invest in research, design and manufacturing technology to ensure that our product range constantly evolves to remain at the cutting edge, whilst being available at a competitive price.

The Super-ted offers features that have been incorporated through extensive experience with both farmers and contractors

**Backup** – After-sales support is our priority, requiring commitment to a comprehensive parts stock and effective Dealer network. We set aside part of our 25,000m<sup>2</sup> facility in Cornwall to a substantial stock of wearing and non-wearing parts to keep you up and running.

**Teagle**

### **Super-ted 221**

Up to 2.2m working width.

Maximum swath size:

- **Grass** - mowers up to 5.5 m.
- **Straw** - combine header up to 12 m.



## Making a difference with a Super-ted

### ✓ **Faster Drying**

With grass, a quick drying time reduces nutrient loss and produces more palatable fodder. High dry-matter silage also results in less effluent being created at the clamp. The Super-ted effect is twofold, typically halving the drying time in the field.

The crop is lifted, with air being introduced to the swath for more even drying from top to bottom.

The waxy cellulose coating on the plant is cracked without damaging the crop to improve evaporation of moisture.

With straw the risk of damage by mould in a damp crop is minimised.

### ✓ **Reduced Crop Contamination**


Crop loss is minimised by keeping the swaths intact and not spreading them across the ground. Stone and soil contamination is reduced by not having to carry out a second raking operation.

### ✓ **Reduced Costs in One Pass**


Save fuel, labour and reduce ground compaction. The Super-ted is a high-speed one-pass operation as there is no need to spread and row up again.

### ✓ **Tidier Swaths**

The swaths produced by the Super-ted are box shaped with clean edges and can be adjusted in width and offset using the rear doors. This enables greater throughputs in the following harvesting or baling operation.

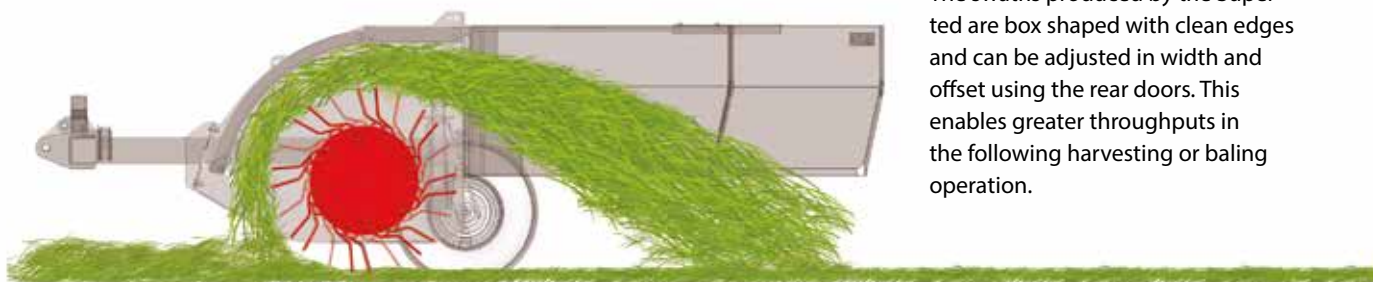

## Key Features

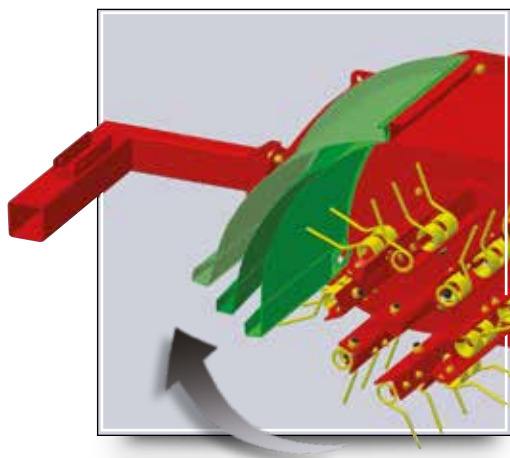

### **Adjustable hood**

Set conditioning intensity to suit your swath by adjusting the front hood clearance.



### **Why settle for less?**

8 rows of high grade spring steel twin-fork tines ensure intensive conditioning.



### **Retained Tines**

Individual tine retainers prevent crop contamination and potential damage to following machinery.



# TED 221





**SUITABLE FOR:** Farmers and Contractors to condition Grass, Hay and Straw swaths.

Working Width	Swath Size / Grass	Swath Size / Straw
2.2 m	Up to 5.5 m Mower	Up to 12 m header

## Outstanding reliability

The Super-ted range is engineered specifically for heavy crops with our attention to detail delivering unparalleled performance in the field in both grass and straw applications.



MODEL	Working Width	A	B*	C	D	Weight	Linkage	PTO
221	2.2 m	1.04 m	3.10* / 2.54 m	3.27 m	1.86 m	795 kg	Cat 2	540

Adjustable front hood	●	8 rows of tines	●	Individually retained tines	●
Low pressure castor wheels	●	Door extensions	●	PTO shaft with over-run clutch	●

\*Wheels fitted/ wheels in transport position

Key: ● = Standard



## “When we buy kit, we want something that will last”

Alistair Hodnett (pictured below) farms 255 acres in partnership with his father Michael on the outskirts of Dundee.

Last year over 24,000 tonnes of straw were procured and retailed, with over 6000 acres of straw from farms in and around the Angus, Fife and Perthshire areas purchased and baled. In addition, 80 acres of haylage and 80 acres of hay are baled on the farm and sold throughout Scotland.


Attention to detail in producing a quality product is paramount when supplying to such a large customer base. Alistair uses a Teagle Super-ted 221, to ted and condition his grass and straw (following a 40' combine header). “I achieve fantastic work rates at a forward speed of around 10mph”.

**“We are delighted with the performance and reliability of our Super-ted”.**

“We use the Super-ted prior to baling as it lifts the crop off the ground, to not only aid drying, but the crop is more easily picked up by the balers. This reduces mechanical damage to the baler pick up and allows the balers to travel faster over the field”.




High forward speed means that huge quantities of grass, hay and straw can be processed, with the adjustable front hood optimising the conditioning action in any crop density.



Model	221
Pick-up width	2.2m (7'3")
Overall height A - in lowest working position	1.04m
Overall width B (with wheels/without wheels)	3.10m / 2.54m (10'2"/8'4")
Overall length C - doors open	3.27m
Overall length D - doors closed	1.86m
Height adjustment	40 - 200mm
Castor wheel tyre size	6.00 - 9
PTO speed	540rpm
PTO type	with over-run clutch
Weight	795kg
Minimum tractor size	60hp (45kW)
Number of drive belts	4 x 'B' Section
Linkage	Cat 2

The company's policy is one of continuous improvement and development, therefore specifications are subject to change without prior notice.

## Focus on Quality

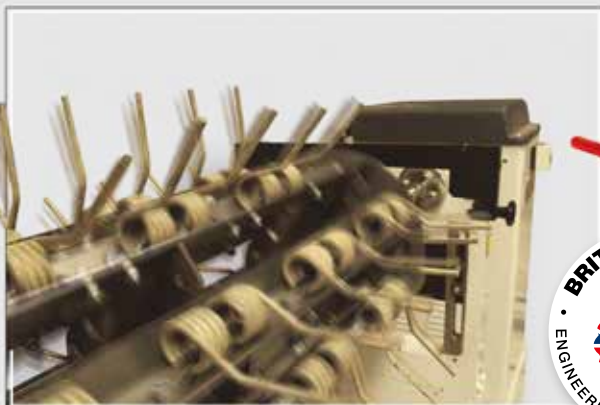

### Precision Engineering

Rotors are balanced using state of the art technology to ensure a smooth running and high performance operation.



### British built and backed

To keep your Super-ted running, Teagle carry a comprehensive stock of spare parts which are available for next day delivery.




# Teagle

With over 75 years experience in designing and manufacturing high quality agricultural machinery you can be confident when you choose Teagle.

Contact us today to discuss your individual requirements.

**Call our Sales Desk:  
01872 560592**

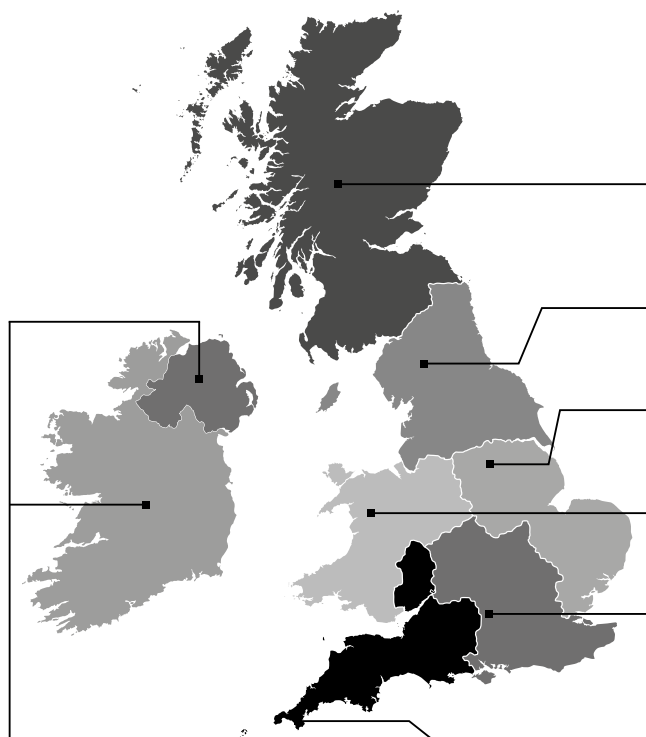

**Scotland Manager**  
David Haggart 07970 136616  
david.haggart@teagle.co.uk

**North Manager**  
Gary Eastham 07866 532666  
gary.eastham@teagle.co.uk

**East Manager**  
David Threadgold 07970 136615  
david.threadgold@teagle.co.uk

**West Manager**  
Steve Offland 07970 462240  
steve.offland@teagle.co.uk

**South East Manager**  
Chris White 07970 136614  
chris.white@teagle.co.uk

**South West Manager**  
Mike Sanders 07970 836705  
mike.sanders@teagle.co.uk

**Ireland and Northern Ireland Sales Manager**  
Frank Byrne +353 (0)871 948404  
frank.byrne@teagle.ie

**Tomahawk 8100**



**Titan 6**



**Topper 8 Offset**



**Dynamo 120**



**XT48**



# Teagle

**Teagle Machinery Ltd**

Blackwater, Truro, Cornwall TR4 8HQ  
sales@teagle.co.uk www.teagle.co.uk

Tel: 01872 560592