





Cultivation and weed control with a single machine!

ZF



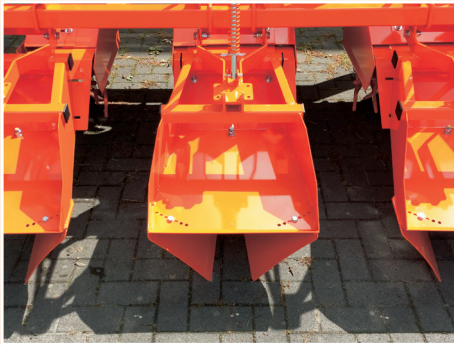

Adjustable ridging point (option)

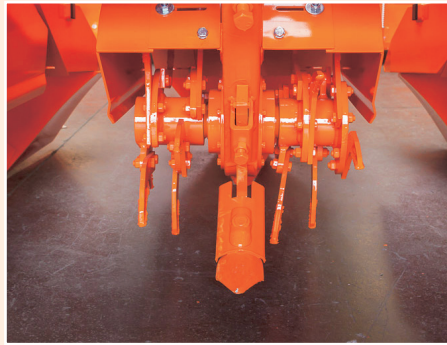

Adjustable tilling units








Crop protection shaft (option)

The ZF is an inter-row rotary cultivator for all types of ridge cultivation. The driveline runs along the top so there is enough clearance to work in high crop. The ZF is ideally suited to tillage (ridging) and mechanical weed control.

Highlights ZF inter-row rotary cultivator

- Can be used from the planting/seeding season to the end of the growing period
- Perfect ridge structure with adjustable ridging hoods
- Rotary cultivation in crops with high foliage and/or floriculture
- Controlling weeds between the rows and restoring the ridge in one pass
- Adjustable tilling units
- Gearboxes from 100 hp to 250 hp
- 4-row or 8-row elements
- All the gearboxes are provided with a shear bolt safeguard
- Equipped with a coupling shaft complete with a cam clutch as standard
- Available from 6x75 cm to 8x90 cm

Dimensions and weights ZF

Type	 min.				
6ZF75	140hp/103kW	4500	6x75cm/6x30"	1000	2650
6ZF90	140hp/103kW	5400	6x90cm/6x36"	1000	2750
8ZF75	170hp/125kW	6000	8x75cm/8x30"	1000	2900
8ZF90	170hp/125kW	7200	8x90cm/8x36"	1000	3000

Illustrations, dimensions and weights may be altered without prior notice.